


BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES										
GC2	T-605	383	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	115	185	225	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	195	240	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
901	J250G	475	130	195	235	5	11 1/2 (292)	7 (178)	11 7/8 (302)	67 (30)
901	J250P	540	135	215	250	6	11 11/16 (297)	7 (178)	11 1/2 (292)	72 (33)
902	J305E-AC	645	160	250	305	5	12 1/4 (311)	7 (178)	14 3/8 (365)	83 (38)
902	J305G-AC	678	175	258	315	5	12 1/4 (311)	7 (178)	14 3/8 (365)	88 (40)
902	J305P-AC*	711	195	271	330	6	11 5/8 (295)	7 (178)	14 3/8 (365)	96 (44)
902	J305H-AC*	781	215	295	360	6	11 5/8 (295)	7 (178)	14 3/8 (365)	98 (45)
903	L16E-AC	766	185	303	370	5	12 1/4 (311)	7 (178)	17 (432)	100 (46)
903	L16G-AC	789	200	320	390	5	12 1/4 (311)	7 (178)	17 (432)	107 (49)
903	L16P-AC*	850	220	344	420	6	11 5/8 (295)	7 (178)	16 3/4 (424)	114 (52)
903	L16H-AC*	935	245	357	435	6	11 5/8 (295)	7 (178)	16 3/4 (424)	125 (57)
6 VOLT DUAL PURPOSE AGM BATTERIES										
GC2	6V-AGM	385	-	154	200	6	10 1/4 (260)	7 1/16 (179)	10 5/8 (270)	65 (29)
12 VOLT DUAL PURPOSE AGM BATTERIES										
27	27-AGM	175	-	76	100	6	12 (305)	6 5/8 (168)	9 3/16 (233)	67 (30)
6 VOLT DEEP-CYCLE GEL BATTERIES										
GC2	6V-GEL	394	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES										
27	27-GEL	179	-	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

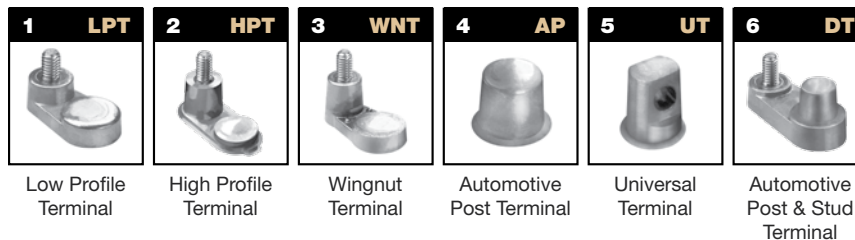

* Polyon™ Case



For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com.