


BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CRANKING PERFORMANCE		CAPACITY ^B Amp-Hours (AH)			TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	CCA ^D @0°F	CA ^E @32°F	5 Hr Rate	20 Hr Rate	100 Hr Rate		L	W	H ^F	
6 VOLT DEEP CYCLE BATTERIES													
GC2	T-105	447	115	-	-	185	225	250	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	-	-	185	225	250	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	-	-	195	240	266	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	-	-	195	240	266	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	-	-	215	260	287	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	-	-	215	260	287	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
12 VOLT DEEP CYCLE BATTERIES													
24	24TMX	140	36	440	540	70	85	94	3	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	47 (21)
27	27TMX	175	45	530	650	85	105	117	3	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	55 (25)
24	SCS150	150	36	530	650	80	100	-	8	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	50 (23)
27	SCS200	200	52	620	760	95	115	-	8	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	60 (27)
30H	SCS225	225	57	665	820	105	130	-	8	13 15/16 (355)	6 3/4 (171)	9 7/8 (251)	66 (30)
6 VOLT DUAL PURPOSE AGM BATTERIES													
GC2	6V-AGM	385	-	1100	1400	154	200	221	6	10 1/4 (260)	7 1/16 (179)	10 5/8 (270)	65 (29)
12 VOLT DUAL PURPOSE AGM BATTERIES													
24	24-AGM	130	-	440	620	61	80	88	6	10 13/16 (259)	6 5/8 (168)	8 7/8 (226)	52 (24)
27	27-AGM	175	-	560	780	76	100	111	6	12 (305)	6 5/8 (168)	9 3/16 (233)	67 (30)
31	31-AGM	190	-	720	950	83	110	122	6	13 1/16 (332)	6 7/8 (174)	8 11/16 (221)	74 (34)
4D	4D-AGM	325	-	1110	1420	131	165	182	6	20 7/8 (530)	8 1/4 (209)	9 3/8 (237)	125 (57)
8D	8D-AGM	460	-	1450	1850	179	230	254	6	20 1/2 (521)	10 9/16 (269)	8 7/8 (226)	167 (76)
6 VOLT DEEP-CYCLE GEL BATTERIES													
GC2	6V-GEL	394	-	575	825	154	189	198	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES													
24	24-GEL	147	-	330	460	66	77	85	6	10 7/8 (276)	6 3/4 (171)	9 5/16 (236)	52 (24)
27	27-GEL	179	-	395	545	76	91	100	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	445	620	85	102	108	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr and 100 Hr rates and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E.** C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

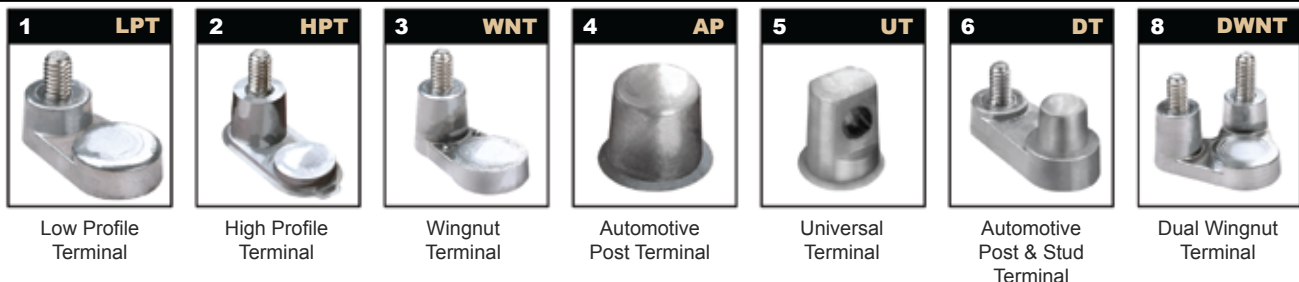

For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com.